

# AN-SFL-PJ/PF

Solar Flood Light

CE (RoHS) Ip66

Anern Industry Group Limited

1st Floor, R&D Building, No.3 Guangpuxi Avenue,  
Science City, Guangzhou, China

# INTRODUCTION

01 PART ONE  
PRODUCT ADVANTAGE

02 PART TWO  
SPECIFICATIONS

03 PART THREE  
DIMENSION FIGURE


04 PART FOUR  
PRODUCT DETAIL

05 PART FIVE  
PACKAGE DETAIL

## Product Advantage

### Integrated Packing Design

Convenient for transportation and resale.

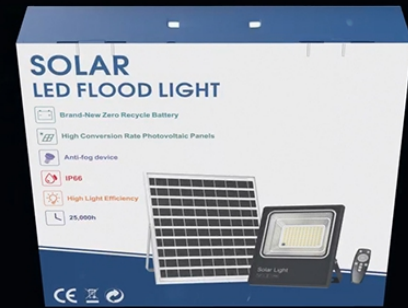

## High-efficiency Respirator

Effectively avoid seal failure and internal fogging caused by thermal expansion and contraction.

# Product Advantage

## Remote Controller

Adjustable brightness dimming function, timing function.



## Outdoor Waterproof

Superior waterproof performance, highly resistant from water and dust.


Model	AN-SFL-PJ				AN-SFL-PF			
Power	50W	100W	200W	300W	50W	100W	200W	300W
LED	5730 46PCS	5730 107PCS	5730 166PCS	5730 358PCS	2835 49PCS	2835 97PCS	2835 127PCS	2835 199PCS
Luminous Flux	140lm/w							
LiFePO4 Battery	3.2V 5.5AH	3.2V 11AH	3.2V 16.5AH	3.2V 27.5AH	3.2V 5.5AH	3.2V 11AH	3.2V 16.5AH	3.2V 27.5AH
Mono Solar Panel	6W	12W	18W	30W	6W	12W	18W	30W
Solar Charging Time	5-6 hours by bright sunlight							
Lighting Time In Rainy Day	3 days							
Lighting Mode	Time control							
Material	ABS plastic							
IP Class	IP66							
Work Temperature	0°C to 50°C							

**PART THREE | DIMENSION FIGURE**

Item No.	AN-SFL-PJ		AN-SFL-PF	
				
	Solar Panel Size	Lamp Size	Solar Panel Size	Lamp Size
50W	270*180*17mm	205*170*42mm	270*180*17mm	205*170*42mm
100W	350*290*17mm	260*215*42mm	350*290*17mm	260*215*42mm
200W	400*350*17mm	290*240*42mm	400*350*17mm	290*240*42mm
300W	600*350*17mm	350*290*43mm	600*350*17mm	350*290*43mm


## 01 High Lumens SMD Led Chips

Maximum brightness up to 140lm/W, high-brightness illumination.




## 02 High-efficient Solar Panels

Higher charging efficiency and faster charging.




## 03 Brand New Zero-Cycle Battery

Long life, sufficient power, low internal resistance.

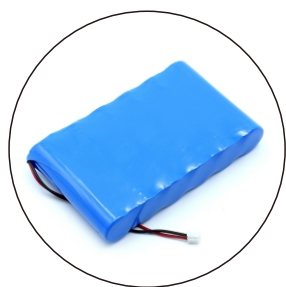

## 04 Adjustable Bracket

Can be adjusted to meet different lighting angle requirements.

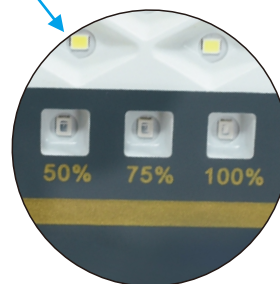

## 05 Battery Indicator

Easy to check the remaining power and charging status at any time.




## User Manuel For Remote Controller:





A N E R N / S O L A R / L I G H T

Anern®

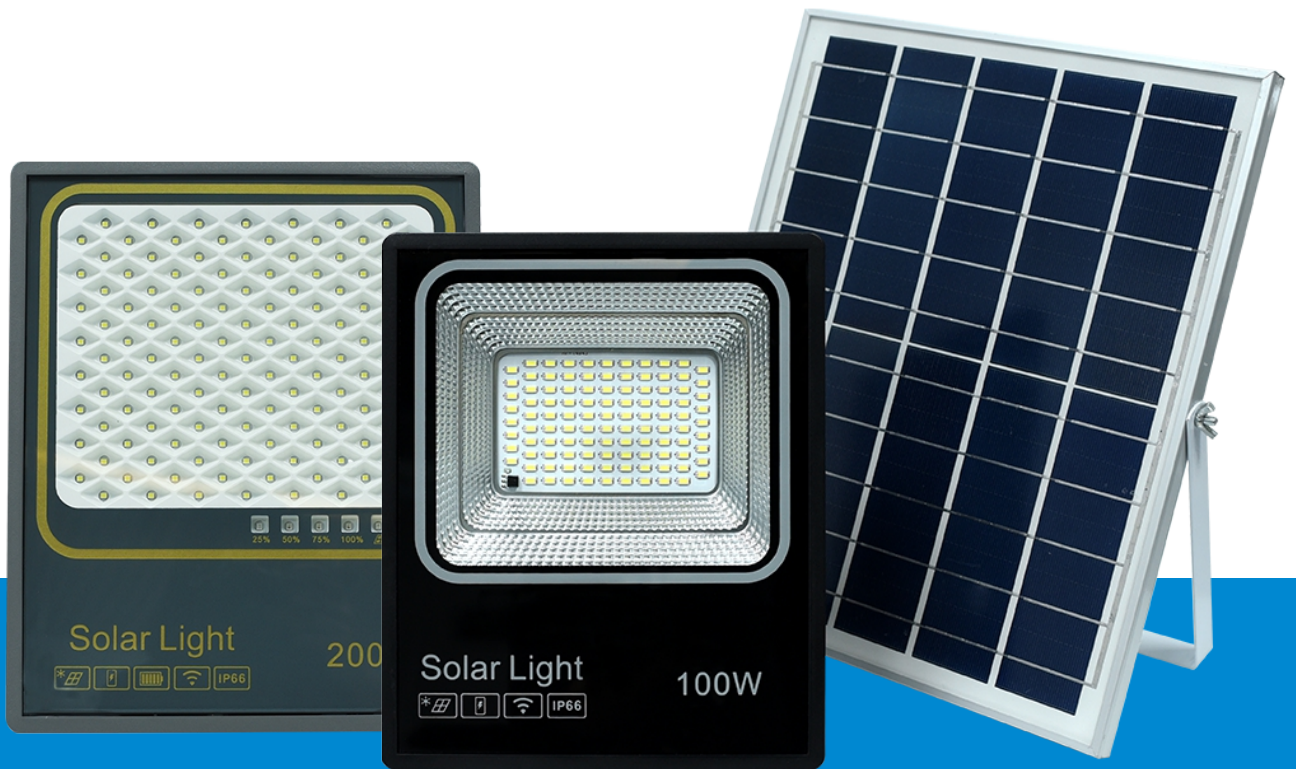

THANKS  
VERY  
MUCH